


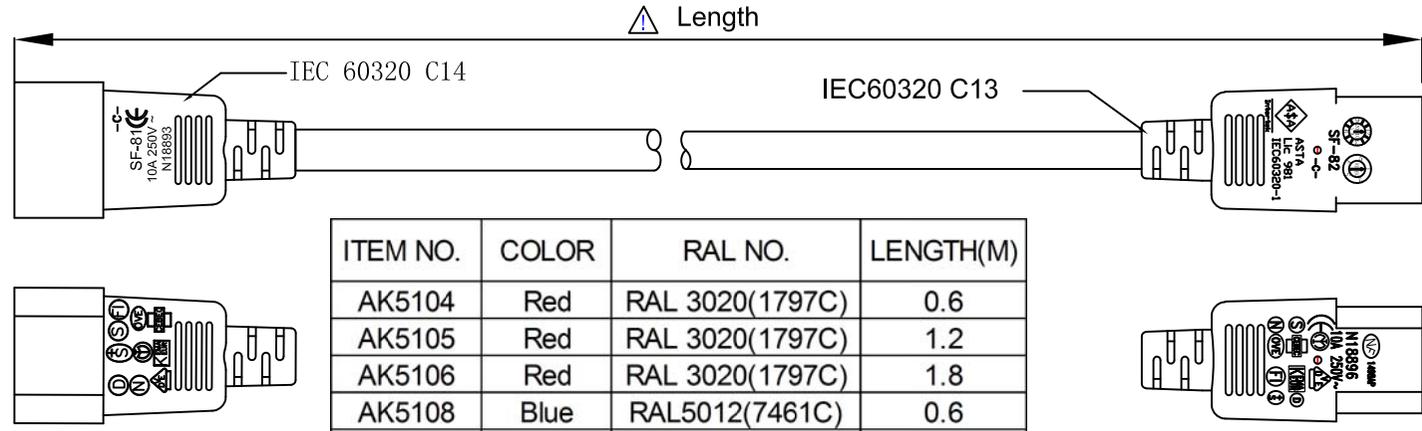


CUSTOMER NAME 資擎  
 CUSTOMER Part No.

7	8	9	10
DATE	REV	DESCRIPTION	BY
2013. 4. 7	A/0	NEW	Lisa
2013. 4. 12	A/1	增加ITEM	Lisa



ITEM NO.	COLOR	RAL NO.	LENGTH(M)
AK5104	Red	RAL 3020(1797C)	0.6
AK5105	Red	RAL 3020(1797C)	1.2
AK5106	Red	RAL 3020(1797C)	1.8
AK5108	Blue	RAL5012(7461C)	0.6
AK5109	Blue	RAL5012(7461C)	1.2
AK5110	Blue	RAL5012(7461C)	1.8
AK5112	Green	RAL 6018(375C)	0.6
AK5113	Green	RAL 6018(375C)	1.2
AK5114	Green	RAL 6018(375C)	1.8
AK5116	Yellow	RAL 1018(109C)	0.6
AK5117	Yellow	RAL 1018(109C)	1.2
AK5118	Yellow	RAL 1018(109C)	1.8
AK5120	Black	RAL9011	1.2
AK5029	Black	RAL9011	0.6
AK5030	Black	RAL9011	1.8

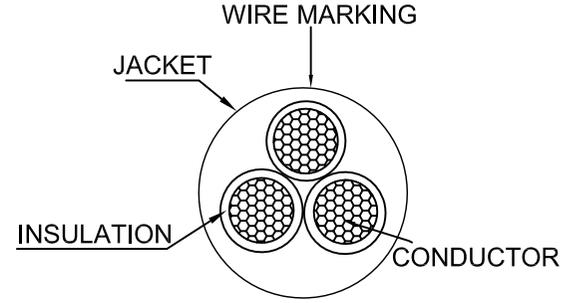

**WIRE MARKING:** + 0 + 0 + 0 KEMA-KEUR (OVE) (S) (N) (D) (FI) Δ CEBEC 972 <VDE> NF-USE 1345  
 (HOLLOW) IEMMEQU H05VV-F 3G0.75MM<sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436






**REMARKS:**

- 1.PLUG(SF-81) RATED POWER:250V 10A
- 2.CONNECTOR(SF-82) RATED POWER:250V 10A
- 3.WIRE: H05VV-F 3G0.75mm<sup>2</sup> RATED VOLTAGE:300/500V
- 4.COLOR:BLACK
- 5.DVW TEST:2000VAC,1S
- 6.POLARIZATION AND CONTINUITY TEST


PAGE	1/1				
Key Size	△				
ROHS COMPLIANT		Part No.	SF-81+SF-82 H05VV-F 3G0.75mm <sup>2</sup>		
Unless specified on the drawing, tolerances are per the follows:		Description			
. ± 0.5		DEP.	R&D	APPROVAL	CHECKER
.X ± 0.1		SCALE			
.XX ± 0.05		UNIT	mm	DRAW	
3RD		Lisa			

7	8	9	10
DATE	REV	DESCRIPTION	BY
2013-4-7	A/0	NEW	Lisa
2013-4-12	A/1	增加ITEM	Lisa

**△ LENGTH**

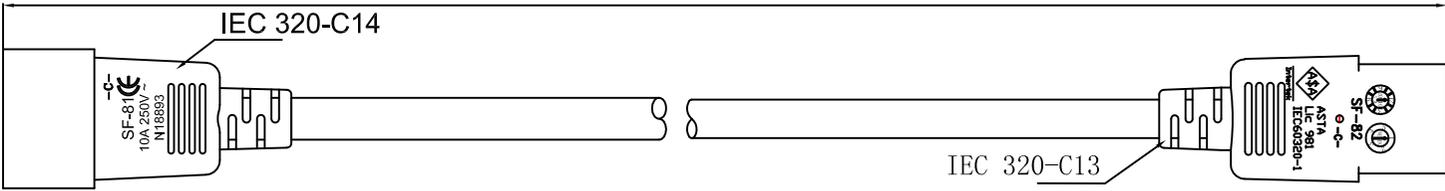

ITEM NO.	COLOR	RAL NO.	LENGTH(M)
AK5107	Red	RAL 3020(1797C)	3
AK5111	Blue	RAL5012(7461C)	3
AK5115	Green	RAL 6018(375C)	3
AK5119	Yellow	RAL 1018(109C)	3
AK5121	Black	RAL9011	7
AK5122	Black	RAL9011	10
AK5032	Black	RAL9011	5
AK5031	Black	RAL9011	3

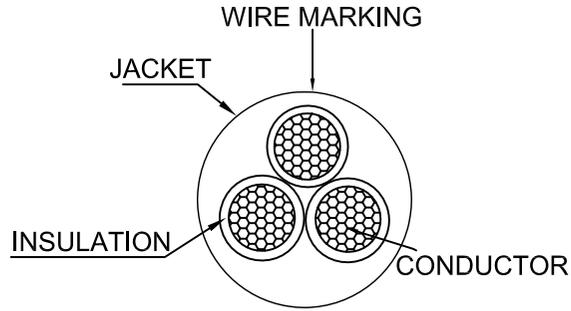

<b>WIRE MARKING</b> (Hollow)	+ 0 + 0 + 0 KEMA-KEUR (VE) (S) (N) (FI) △ CEBC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G1.0MM <sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436
---------------------------------	---

**REMARKS:**

- 1.PLUG(SF-81) RATED POWER:250V 10A
- 2.CONNECTOR(SF-82) RATED POWER:250V 10A
- 3.WIRE: H05VV-F 3G1.0MM<sup>2</sup> RATED VOLTAGE:300/500V
- 4.DVW TEST:2000VAC,1S
- 5.POLARIZATION AND CONTINUITY TEST

PAGE	1/1	<b>AC</b>			
Key Size	△				
ROHS COMPLIANT		Part No.	SF-81+SF-82 H05VV-F 3G1.0MM <sup>2</sup>		
Unless specified on the drawing, tolerances are per the follows: . ± 0.5 .X ± 0.1 .XX ± 0.05		Description			
3RD		DEP.	R&D	APPROVAL	CHECKER
		SCALE			DRAW
		UNIT	mm		Lisa